

Sight glass - Tubular type

with flanged connection acc. to ANSI 150 lbs

NORIS

Bauform 20-A

Application:

Sight glass - Tubular type with flanges on both sides to use in either horizontal or vertical pipe lines for optical control of fluids and gasses.

Operating conditions:

Connection: ANSI-Flanges 150 lbs-RF
 Pressure: up to DN 100 - 6 bar max
 DN 125 and up – 4 bar max
 Temperature: 200°C max.

Installation:

Optional

Special designs:




Protection jacket of acrylic glass
 Extra length

Materials:

Flanges	WN 1.4571	Steel / H II
Screws	A4 - 70	Steel
Glass tube	Borosilicate glass (DURAN)	
Gaskets	Viton or PTFE (or other materials)	

Ordering example:

Sight Glass - Tubular Type Bauform 20
 WN 1.4571;
 Max. 6 bar / 200°C
 ANSI 2", 150 lbs

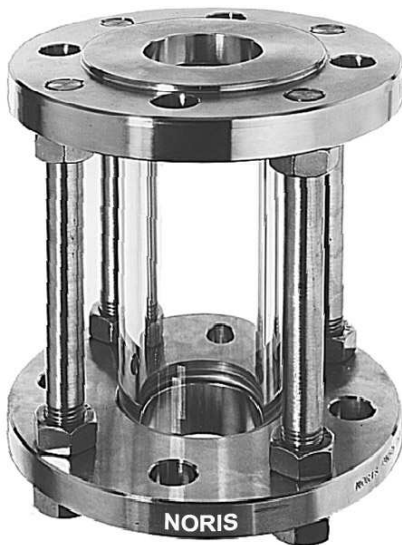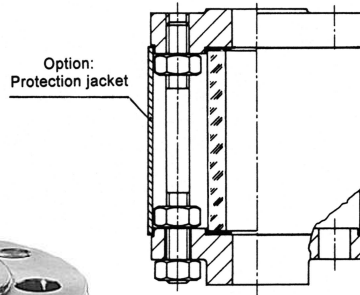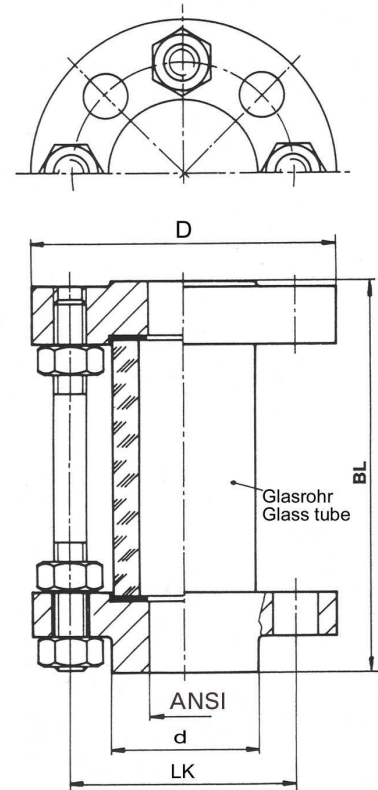

Dimensions:

ANSI	D	d	BL	Screws	LK
1/2"	89	35	200	4	60,3
3/4"	98	43	200	4	69,8
1"	108	51	200	4	79,4
1 1/4"	118	64	200	4	88,9
1 1/2"	127	73	200	4	98,4
2"	152	92	200	4	120,6
2 1/2"	178	105	200	4	139,7
3"	191	127	200	4	152,4
4"	228	157	200	4	190,6
5"	254	186	200	8	215,9
6"	279	216	200	8	241,3
8"	343	270	200	8	298,4

Mounting instructions:

Sight glass tubular type must be mounted without tension by tube, vibrations and pressure pushes.

Modification reserved

NORIS ARMATUREN Burkenstein GmbH & Co. KG

Puscherstrasse 3
 D-90411 Nürnberg

Telefon: +49 (0) 911 / 52 150 63
 Telefax: +49 (0) 911 / 52 24 40

Internet: Noris-Armaturen.de
 E-Mail: Noris@Noris-Armaturen.de